


SED

4/8 Port Decimator D2

SED's 4/8-Port Decimator is a second generation spectrum measurement and analysis unit in a 1U chassis with an integrated 8-port RF switching capability. It is ideal for either local or remote monitoring of multiple feeds and carriers. The 8-Port Decimator can function as an independent spectrum analyzer or can be easily integrated into a larger measurement network.

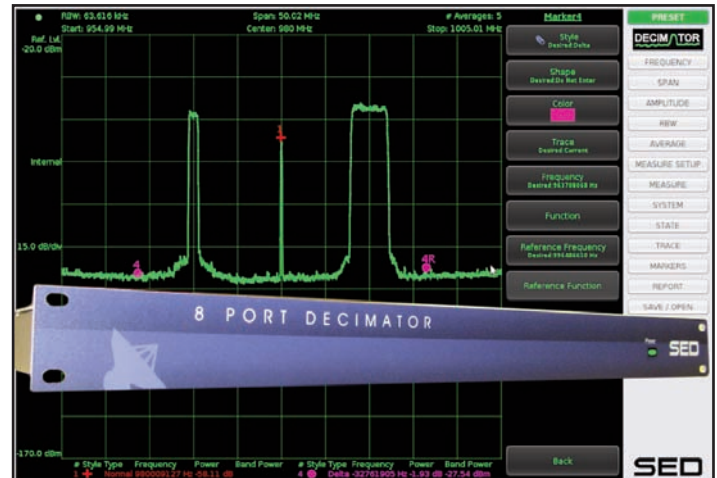

The 8-Port Decimator can be installed anywhere, occupying only 1U in a standard equipment rack, allowing you to monitor up to 8 different feeds. This is ideal for a teleport, VSAT hub or broadcast facility with multiple feeds to monitor. It is available with 75-ohm F-type connectors or 50-ohm SMA connectors on the inputs. It can also be provided as a 4-Port Decimator, which is the same unit limited to 4 operational ports, allowing expansion to the other 4 ports in the future if required. No need to install additional hardware.

It uses state of the art digital technology and Fast Fourier Transformations to make quick and accurate measurements. With a very low noise floor and large dynamic range, it is well-suited to measurement of any type of satellite carrier, including very small carriers, beacon signals and for carrier monitoring applications. Decimator accepts all L-band signals from 950 to 2,150 MHz and input power levels ranging from -110 to +5 dBm. RBW varies from 4 Hz to 500 kHz. The Decimator can be connected to an external 10 MHz reference for improved frequency accuracy and stability. All data communications with the Decimator occurs via its built-in Ethernet port.

The 8-Port Decimator's powerful Graphical User Interface (GUI) is available using any standard web browser. No additional software is required. The GUI is very easy to use and operates like most traditional spectrum analyzers. It provides user-selectable colors for markers and traces, allows storage of multiple traces and provides measurement reporting. The Decimator GUI also includes two powerful applications: The built-in **Carrier Monitoring** function, provides notification via email or SNMP of carrier measurements that exceed user-defined limits, offering you peace of mind that up to 100 of your carriers are operating as expected. The 8-Port Decimator also includes a convenient **Cross-Pol Isolation** measurement function, allowing you to display both Co-Pol and Cross-Pol signals simultaneously, along with the isolation value.

The 8-Port Decimator provides network access to all technical staff connected to the facility network or a corporate wide area network. This allows all technical staff the ability to monitor feeds and carriers at any time and from any location in the world using only a web browser.

For integration into a larger measurement or carrier monitoring system, the 8-Port Decimator can be operated via its built-in GUI or the user can create a separate user interface using the publicly available API. An SNMP status interface is also provided.

Features

Overview

- 8 user selectable input ports
- covers full L-band from 950 to 2,150 MHz
- built-in Carrier Monitoring and Cross-Pol Isolation functions
- External 10 MHz reference or internal reference
- Web browser or API control
- SNMP status interface
- Standard 19" 1U Rack Mount Chassis
- available as 4-Port unit

Physical Interfaces:

RF Inputs:	8 x Type F, 75 ohms or 8 x SMA, 50 ohms
Control:	RJ-45
Reference:	BNC, 50 ohms
AC Power:	IEC 60320
Mechanical:	1.75"H x 19"W x 10"D

Certifications:

EMC/EMI:	EN 61000-6-2, EN 61000-6-4 FCC Title 47, Part 15
Safety:	EN 61010-1 UL 61010-1 CSA22.2 No. 61010-1

Private labelling, as well as custom designed versions supporting other frequency bands or form factors are available. Contact SED for more information.



For further information on this innovative product please contact:

Tim Braun
Marketing Manager
Network Management Systems

Phone: (306) 933-1518
Fax: (306) 933-1486
Email: braunt@sedsystems.ca

Specifications

RF (L-Band) Input:

Input Frequency Range:	950 MHz to 2,150 MHz
Useable Dynamic Range:	-110 to +5 dBm (aggregate)
Noise Floor:	-145 dBm/Hz typical at minimum attenuation -115 dBm with RBW=1 kHz
Phase Noise:	-80 dBc/Hz at 1 kHz offset -95 dBc/Hz at 100 kHz offset -125 dBc/Hz at 1 MHz offset
Maximum Safe Input:	+10 dBm
Input Isolation (port to port):	48 dB (min)
Input Return Loss:	12 dB (min)

Measurements:

Amplitude Accuracy:	± 1.0 dB (at 25°C) ¹ ± 1.5 dB (5 to 40°C)
Frequency Accuracy:	± 2.6 ppm (internal) ± 10 Hz (external)
Frequency Resolution:	4 Hz
Resolution Bandwidth:	4 Hz to 508.928 kHz ²
Spurious:	
DC Offset:	< -55 dBc (typical)
Images:	< -55 dBc (typical)
Aliasing:	< -45 dBc (typical)
Single Measurement Span:	16 kHz to 52 MHz
Multiple Measurement Span:	52 MHz to 1200 MHz
Averaging:	up to 100 averages
Measurement Speed ³ :	
52 MHz span, 16 kHz RBW	0.9 seconds
3.5 MHz span, 8 kHz RBW	0.3 seconds

Other Specifications:

Reference Input:	10 MHz, -2 dBm to +16 dBm
Control Interface:	TCP/IP API, SNMP, HTTP
Power Requirements:	100-240 VAC, 47-63 Hz, 20W
Operational Temperature Range:	0 to 50°C

Notes:

1. Measurement conditions: 10 averages, input level between -8 dBm and -68 dBm, 3 sigma.
2. Resolution bandwidths auto or manual adjustable. Available bandwidth limited by span, decimation rate and window type.
3. Expected rates with 2 MHz to 52 MHz span, 10 averages, 50% overlap, speed optimization, using API.
4. All specification at 25°C unless otherwise noted and are subject to change without notice.